

Vehicle Talks to IoT for Better Driving Experience

Toshio Ito

Shibaura Institute of Technology
307 Fukasaku, Minuma-ku, Saitama city 337-8570 Japan
+81-48-720-6167, tosi-ito@shibaura-it.ac.jp

Alanazi Yunus Ali S

Shibaura Institute of Technology
Nakano-ku Honmachi 6-19-8, Tokyo, 164-0012 Japan
+81-80-30-81-73-61, mr-younees@hotmail.com

Dai Watanabe

Shibaura Institute of Technology

ABSTRACT

Internet of vehicles (IoV), or (V2X) vehicles to everything all this is a relatively new concept for all vehicles connected to the internet. In this paper, we propose solution of problems in traffic congestion. Road traffic congestion continues is a major problem in many developed countries and that will determine where traffic congestion at the time of rainfall, the position data based on GPS and sensors at vehicles. The sensors in the vehicles required to collect information to evaluate the congestion through cloud server via protocols like (CoAP, MQTT). In the beginning authors introduced the problems and then proposed a solution.

Key words: IoV, V2I, V2X, GPS, CoAP, MQTT

INTRODUCTION

Internet of Things (IoT) have many benefits and features nearly in technology. It creates a major change in the behavior of humanity daily lives. IoT able to save time and money and effort as well. And makes new opportunities for development, innovation, and knowledge. Also IoT able to Solve challenges facing smart cities by providing and collecting information. And when IoT technology intervene in the field of vehicles. It will create a new concept. The concept of Internet of Vehicles (IoV) is a future for smart transport. Smart sensors in the vehicle need to collect information in cloud server by using protocols such as (CoAP, MQTT). This requires robust sensors which are able to reliable of deliver information to the systems. such as (vehicle status, position, energy usage profile, driving profile). They interact with external systems (traffic control systems, parking management, electric vehicle charging). The idea in IoT can be assigned an IP address and provided with the ability to transfer data to a network. Vehicles fuel sensor capable of alerting the driver when the tank is empty and sensor of energy statue, the IoT protocols will allow monitoring and controlling remotely, over an existing network resulting in to improve accuracy, efficiency, and security. In the past years, the new advantages inserted by the vehicles companies, the vehicles have become increasingly software driven and at the same time dependent. the auto industry has a longer and richer track record than any other sector by offering a series of improvements aimed at safer driving. Or Self-driving and avoid a collision. by studying how IoV can eliminate the needs to be in the close of a vehicle to perform diagnostics. By surveillance, all the aspects of the vehicles are easier to reveal any trouble in advance by sending all sensor readings to a certified center where service of the vehicles company will able to find and predict check failures of key systems integrated into the vehicle. In addition to the check part, this management system will help drivers

to keep track of the yearly maintenance, programming service appointments or analyzing the fuel consumption and giving advice for a friendlier driving style. In a difficult position like an accident, such a system would be able to inform the emergency rescue service when the driver is helpless, finding the chances for the wounded to live by reducing the overall time of the rescue mission.

Problem Statement

The safety in the vehicle is the main issue. In order to ensure the safety of driver and passengers, it is of major importance all the information provided by the embedded sensor that is more reliable. Indeed, based on a large number of application to integrate data from information received from several sensors, especially in the application of localization vehicle The second problem is the traffic jams at the time of rainfall. This will be a major threat to the driver of the risk of an accident.

IoV (INTERNET OF VEHICLE)

IoT is able to organize the vehicles in order to avoid traffic congestion. and to improvement drive energy use. This may be done in coordination and cooperation with the infrastructure of a smart city's traffic control and management system. more mutual communications between the vehicles and with the infrastructure able to making new methods to achieve traffic safety, then taking part to the reduction in the number of traffic accidents.

The connection of internet to the vehicles it enables information sharing and collection of information on vehicles, infrastructure. Moreover, processing, computing, sharing and creating security path to the information on the information platforms. Based on this data, the system can effectively guide and supervise vehicles make a transport easier and safer. Smart sensors in the vehicles and in Infrastructure produce very much information about the state of vehicles and roads. This information needs to collect provided by sensors and send it through protocols to a cloud server to be analyzed and sent it again in the form of realistic results to vehicles².

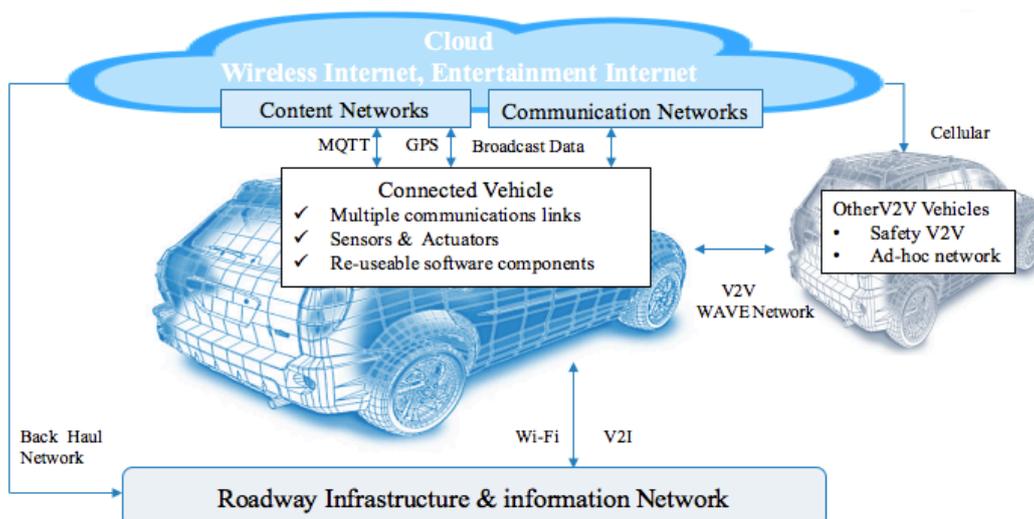


Fig1. Vehicle connected to the internet

Related Studies

Study of proposed about [Road Traffic Congestion in the Developing World] Authors of [Vipin J, Alshlesh S, Lakshminarayanan S]³ illustrated in this study paper the goal is to design mechanisms to detect the state of traffic congestion in and around critical congestion areas and also design simple preventive mechanisms to prevent critical congestion areas from hitting congestion collapse algorithm based on the analysis of traffic images from live traffic, the image processing algorithm to estimate traffic density at a hot-spot by using CCTV camera feeds. There are several metrics that define traffic characteristics in this papers such as speed, flow, and density of a link. The detection mechanism is divided into two parts, a day time and a night time estimation methodology. Both mechanisms are different due to the high environmental differences, which results into two different image processing techniques. Apart from the environmental differences, vehicle's headlight and billboard illumination add considerable noise to the image making vehicle counting difficult. The hardest part of the problem of determining the traffic congestion in the night time. Night time congestion detection is a harder problem because of multiple extraneous factors. Also, the absence of light eliminates typical vehicle feature estimation techniques. The next contender for vehicle identification becomes headlight counting, which suffers from light reflection and alternate light sources such as billboards and traffic signal lamps. In this case, light from multiple vehicles becomes difficult to distinguish and provide correct information in this system³. And about another proposed [Effect of Rain on Travel Demand and Traffic Accidents] Authors of [Edward Chung, Osamu Ohtani, Hiroshi Warita, Masao Kuwahara and H. Morita]⁴. Illustrated in this study the relationship between the weather and the performance of traffic, and the traffic road deteriorate with poor weather, and there is no detailed information to the driver, this study attempts to address to using mesoscale weather data and numbers of trips and accidents recoded on the Tokyo Metropolitan Expressway. With using ITS speed limit and warning messages displayed on VMS which only applies under wet conditions based on meteorological stations, to reduce the number and severity of accidents⁴. However, none of these studies applied there are The aforementioned solutions present no way to deploy the monitoring system easily, nor do they mention the use of a highly distributed system, a key component of IoV traffic congestion. Most importantly, the related papers did not thoroughly test their IoV systems to prove that their solutions are reliable on a large scale.

Proposed Solution

in this proposal we propose and focus on a solution problem of traffic congestion, when it is raining and the vehicle speed come slow the traffic congestion come over, and we can measure amount of rain by using the sensor to calculates the amount of falling rain on the windshield wipers the sensor using wipers movement speed and vehicle location. the windshield wiper is a device used to remove rain or snow from a windshield.

A wiper usually consists of a metal arm, pivoting at one end with a long rubber blade attached to the other. The arm is powered by a motor, the blade swings back and forth over the windshield, and pushing water from the windshield. The driver can change the wipers speed depending on the rain amount on the windshield. The wiper has a several continuous speeds and often two or more settings. Most vehicles use one or two of wipers arms. In wiper speed control levels there are three movements. The first is an INT-Intermittent wiper, second is LO-Low wiper speed, and third is HI-High wiper speed. whose selection made by the driver. And depending on the sensor of wiper speed can determine the amount of rainfall. That mean the rain amount will be calculated by the wipers speed. As shown in Figure 2.

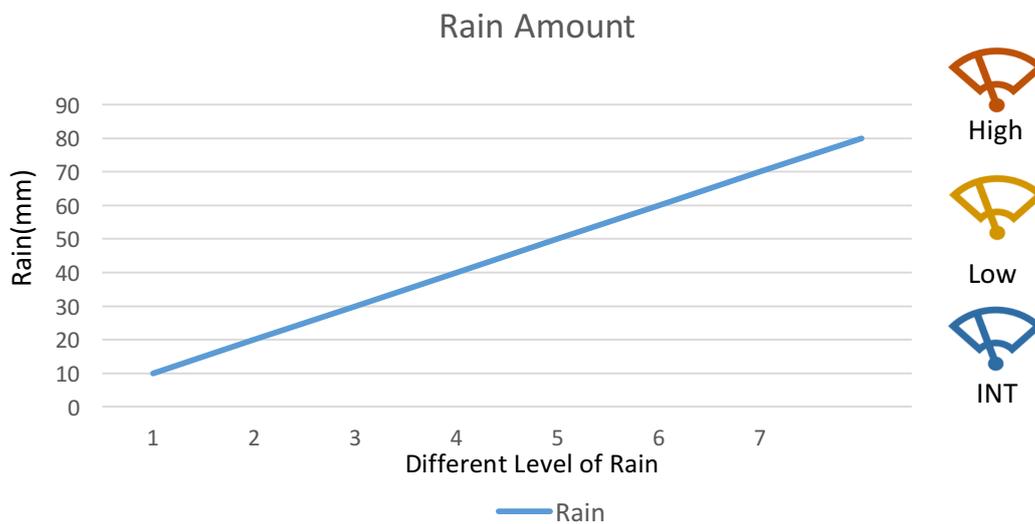


Fig 2. Connect the wipers speed with Rain level

Architecture of the IoV and Management System

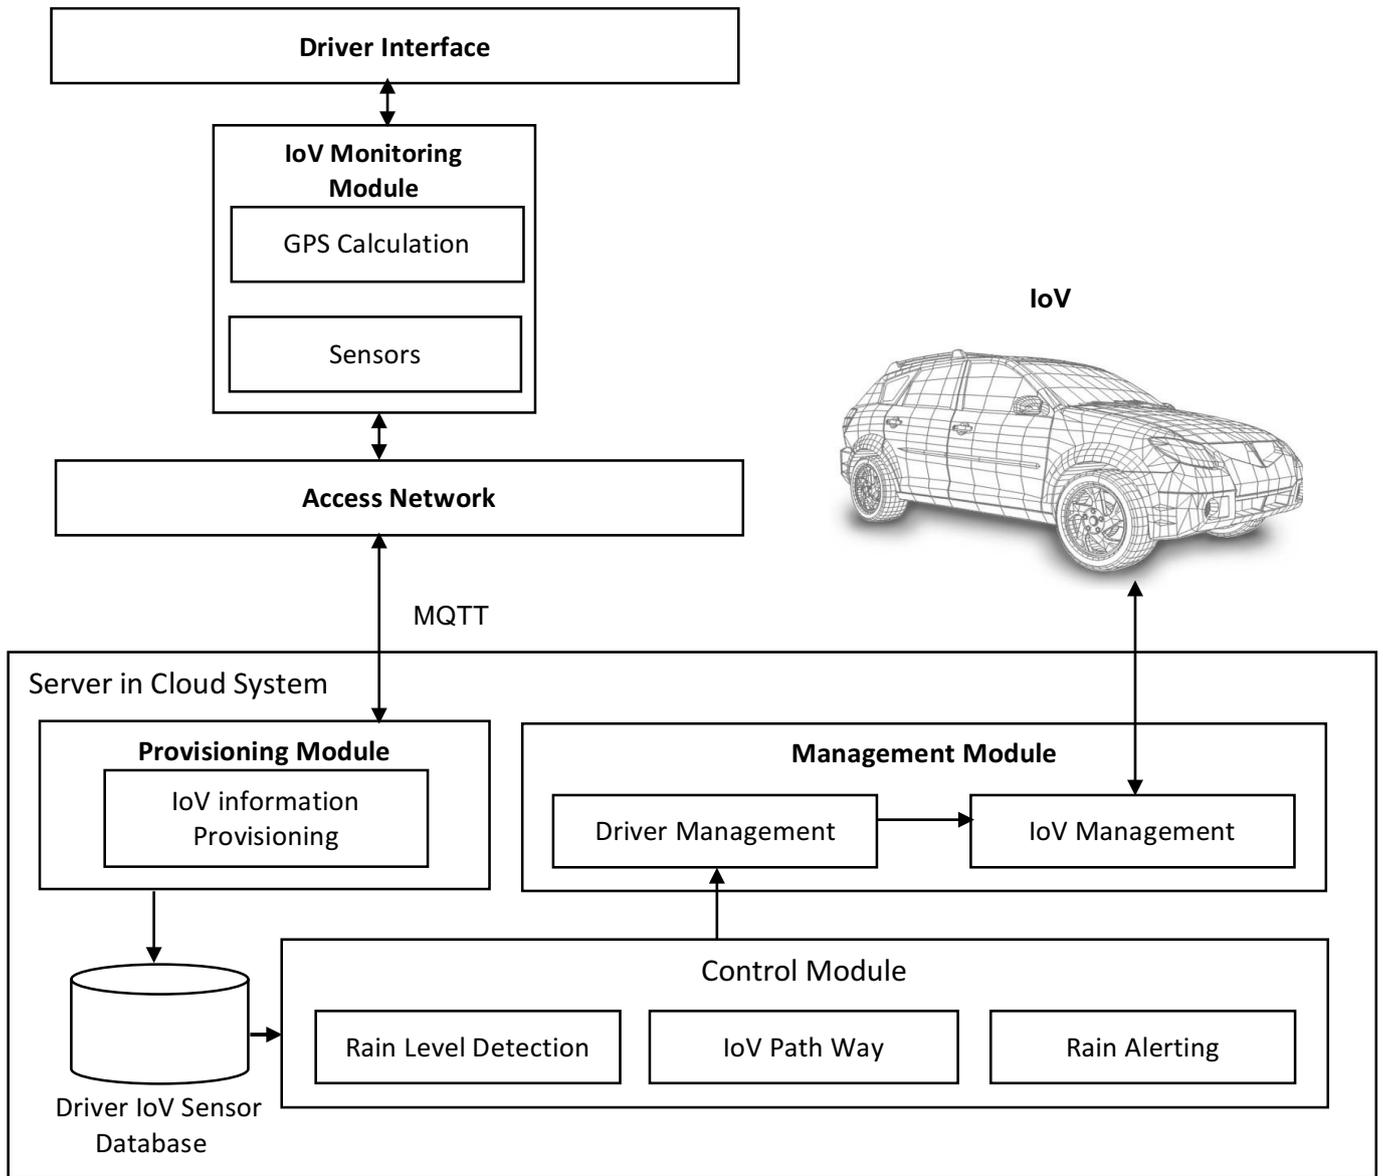


Fig 3. System Architecture of IoV

First collect important data from the vehicle. They contain the vehicle location and data sensors. And update the data by MQTT protocol to cloud server. The provisioning Module send information to Driver IoV sensor database. The Rain level detection sub-module implements the rain level detection algorithm by reading real-time sensor information from the database, checking for wipers speeds in vehicle and then preparing data to make the needed IoV path way. The IoV path way sub-module receives collision information from the collision detection sub-module, performs the path way adjustments and sends the updated path way to the IoV management module where it can be deployed to the IoV. The Rain alerting sub-module reports detected rain level and adjusted path way data to the driver management module, where it can then be displayed to the driver, as shown in Figure 3.

IoT PROTOCOL

In this propose will be using MQTT because The MQTT protocol is a lightweight message queueing and transport protocol. Also, MQTT is suited for the transport of telemetry data sensor. MQTT is very lightweight and thus suited form M2M, WSN in the end IoT where sensor and actor nodes communicate with applications through the MQTT message broker. The protocol uses a publish and subscribe in disparity to HTTP with it is request and response model. Publish and subscribe is sensor output and enables messages to be pushed to drivers. The important communication point is the MQTT broker, it is in charge of dispatch whole messages between the senders and right receivers. Every driver published a message to the broker, covers a subject into the message. The subject is the send information for the broker.

The most relevant MQTT parts for this proposal division of publisher and subscriber, and can be a feature in the points:

1. Use over time to communication model with message events.
2. Low overhead 2 bytes' header from low network bandwidth applications.
3. Publish / Subscribe Publisher and Subscriber model.
4. Separating data producer-publisher and data used subscriber through subject's message queues.

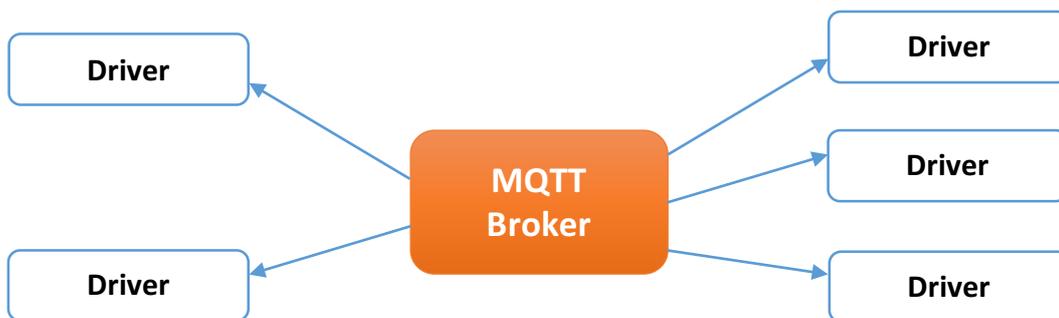


Fig 4. Driver Broker

The sensors in vehicles will be connected to MQTT broker, which work as a gateway to the MQTT broker, which build in the cloud. On the control center, it has an MQTT driver and receives the information. As shown in Figure 4.

MOSQUITTO MQTT DRIVER

The MQTT driver is used fundamentally as a publisher for information received from The MCU device. Whole The sensors connected information are sent over a network to a broker and send it to could server in order to be analyzing the results process, and presented in the form of real information to the drivers. The MQTT broker is considered to be appropriate to keep the processing power needed for the system. And use real-time location through GPS service in the system for more measurements accurate. The Mosquitto MQTT server used for send and receive information between the publishers and subscriber and managing information collector as shown in Figure 5. The future will make a powerful platform with many users, And the focus here will be on the communication vehicle to anything (V2X) with the cloud server, more precisely send diagnostic information by IoT protocols.

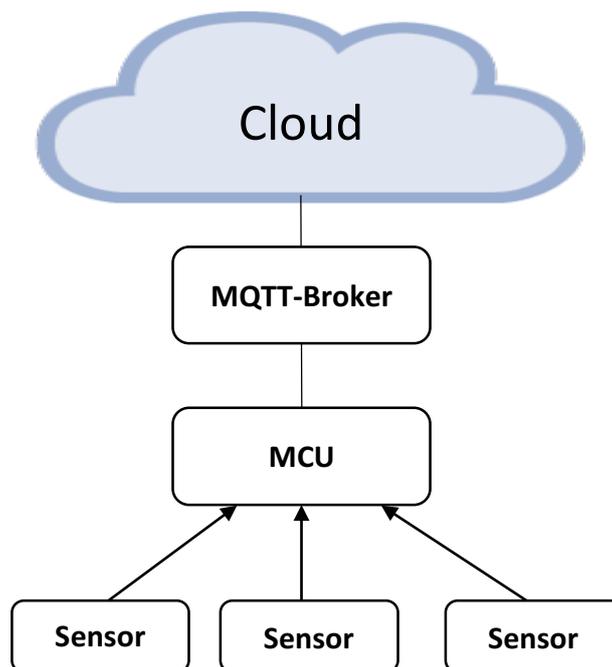


Fig 5. Connected Vehicle driver

CONCLUSION

In this proposal illustrate a scenario for IoT connected vehicle by using MQTT Mosquitto broker to transfer data from sensors in the vehicle to cloud server to avoid the traffic congestion and to reduce the number and severity of accidents during rainy condition. IoT integrated solution will provide correct information in order to avoid similar scenarios. And presented for driver real information at the real time. This most important point to connect IoT in the vehicle:

- IoV enhances the driving experience by sending information to the cloud for more analysis.
- Protocols like MQTT is lightweight and send data of the sensors effectively.
- Many IoT data means much information about the driver and vehicle.
- Difficult driving conditions like driving in the rain need to analyze individually.

REFERENCES

1. Ovidiu V, Peter F, (2014). *Internet of Things from Research and Innovation to Market Deployment*, River Publishers.
2. Ovidiu V, Peter F, (2016). *Internet of Things Connecting the Physical, Digital and Virtual Worlds*, River Publishers.
3. Vipin J, Alshlesh S, Lakshminarayanan S, (2012). *Road Traffic congestion in the Developing World*, New York University.
4. Edward C, Osamu O, Hiroshi W, Masao K and H. Morita (2005). *Effect of rain on Travel Demand and traffic Accidents*.